

# Stan Dawes Fencing Supply & Install BASTION PRO


BASTION PRO Panels are ideal where security is required but without an oppressive and intimidating appearance. It is designed to be strong and resilient and yet remain unobtrusive and elegant.

## SPECIFICATION

The panels are manufactured from 4.5mm thick steel wire, profiled horizontally to significantly increase the rigidity of the panel. The mesh itself is at variable spacings both horizontally and vertically and fully welded at every intersection. The width of these panels suit post centres of approx. 3000mm and the panel has a flush edge.

Type	Panel Height	No of clips Per post
Pro 1800	1850mm	7
Pro 2000	2050mm	8
Pro 2400	2405mm	8
Panel Width	3044mm	

The Hexaclip RHS posts are manufactured from 60x40mm steel section and have a unique and patented fixing method specially designed by to give maximum possible resistance to vandalism and attempts to force entry. The welded mesh panels are located on the face of the post with two piece clips fixed with 'anti-tamper' bolts. These clips firmly clamp the end vertical wires, providing an extremely secure fixing.

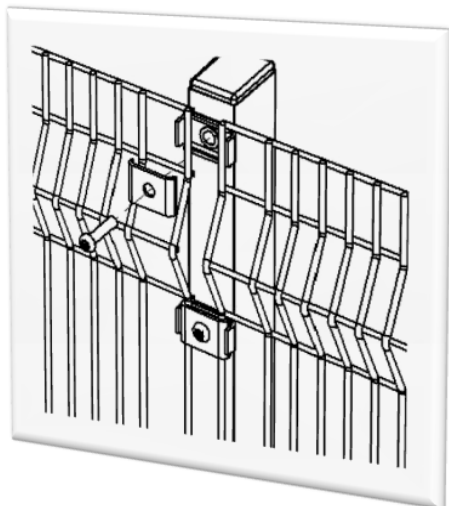

**Standard Post & Panel Fixing**



## PROFILED WELDED MESH PANEL FENCE



**VARIABLE WIRE SPACINGS –**  
*Both horizontally and vertically  
for a distinctive appearance*


**DIFFICULT TO CLIMB –** *No foot holds*

**3000mm WIDE PANELS –**  
*Reduces number of posts required,  
versus conventional mesh systems*

# BASTION GATE

## STANDARD SWING GATE SIZES AND OPENINGS TO SUIT THE BASTION PRO SYSTEM:-

Gate Width	Leaf Type	90 Degree Opening		180 Degree Opening	
		Between Posts	Overall Posts	Between Posts	Overall Posts
1200mm	S/L	1265mm	1425mm	1205mm	1365mm
3000mm	D/L	3120mm	3280mm	3000mm	3160mm
4000mm	D/L	4120mm	4320mm	4000mm	4200mm
5000mm	D/L	5120mm	5420mm	5000mm	5300mm
6000mm	D/L	6120mm	6420mm	6000mm	6300mm
7000mm	D/L	7150mm	7510mm	7020mm	7380mm
8000mm	D/L	8150mm	8510mm	8020mm	8380mm
9000mm	D/L	9150mm	9550mm	9020mm	9420mm
10000mm	D/L	10150m m	10550m m	10020m m	10420m m

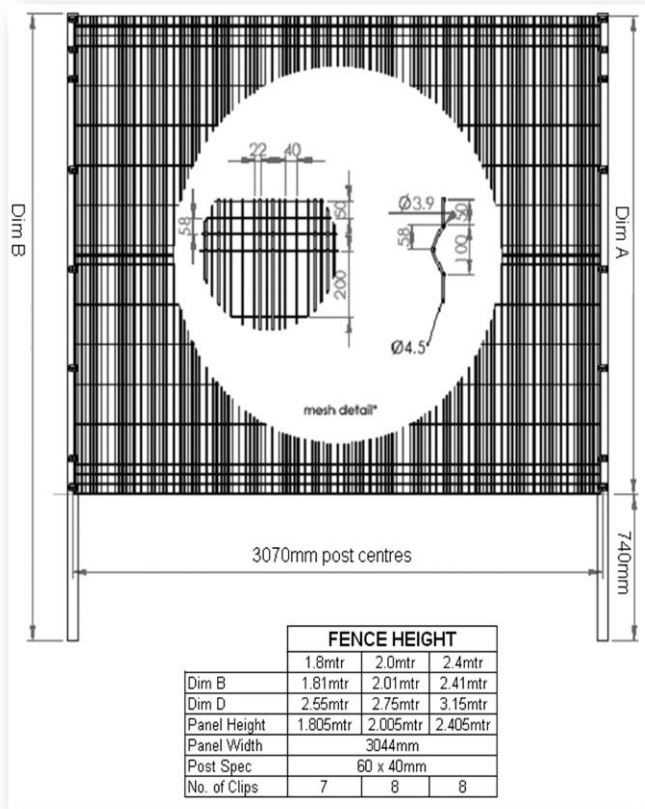

### FINISH

This system is supplied in a polyester powder coated finish as standard.

### GATE INFILL

A flat DUO Twin wire mesh infill panel is welded into a standard Bastion swing gate frame. As well as swing gates we can also supply a range of cantilever and tracked sliding gates.



### BRITISH STANDARDS / QUALITY ASSURANCE

Swing Gates and posts are manufactured generally in accordance with (and in some respects exceed) the requirements of BS1722, Part One (for heights of 1.8mtr high and below). The standard width of a single leaf gate is 1200mm wide, enabling it to fall in line with disabled access requirements.

# BASTION PRO

*The Professional Choice*

