


Stan Dawes Fencing Supply & Install BASTION V

SPECIFICATION

BASTION V panels are manufactured from 5.0mm thick steel wire with profiled horizontal sections that significantly increase the rigidity of the panel. The mesh itself is 50mm x 200mm, fully welded at every intersection. The panels have a barbed edge and a flush edge. The client has the option of installing the barbed edge at the top of the fence, as a deterrent to climbing, or at the bottom, for example where the fencing is one of the lower heights in a playground situation. Please be aware, however, that if you require the barb down option then an inverted clip will need to be ordered. The width of the V panels suits post centres of approx. 3030mm and the following heights are available as standard:-

Type	Panel Height	No of clips Per post
V 1800	1810mm	7
V 2000	2010mm	8
V 2400	2410mm	8
Panel Width	3000mm	


The Hexaclip RHS posts are manufactured from 60x40mm steel section and have a unique and patented fixing method specially designed by to give maximum possible resistance to vandalism and attempts to force entry. The welded mesh panels are located on the face of the post with two piece clips fixed with 'anti-tamper' bolts. These clips firmly clamp the end vertical wires, providing an extremely secure fixing.

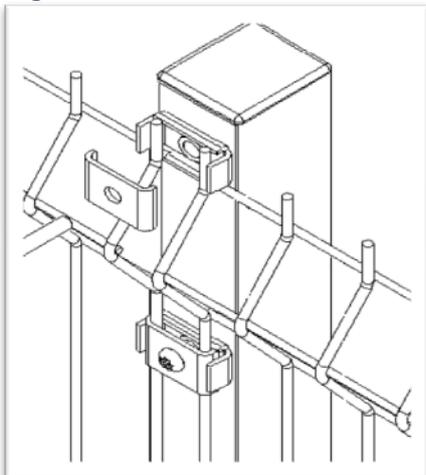

POST AND PANEL FIXING



PROFILED WELDED MESH PANEL FENCE

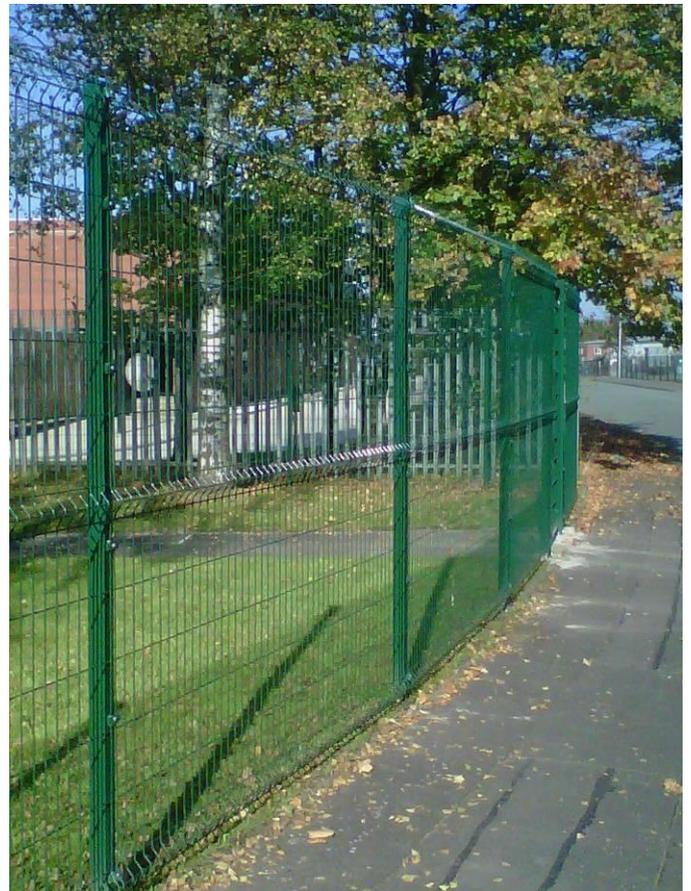

FINISH

This system is supplied in a polyester powder coated finish as standard.

STYLISHLY APPEALING –
Wide range of colour options
UNIQUE HEXACLIP FIXING SYSTEM -
Secure fixing of panels to posts
RESILIENT - Resistant to general vandalism

BASTION GATE

STANDARD SWING GATE SIZES AND OPENINGS TO SUIT THE BASTION V SYSTEM:-


Gate Width	Leaf Type	90 Degree Opening		180 Degree Opening	
		Between Posts	Overall Posts	Between Posts	Overall Posts
1200mm	S/L	1265mm	1425mm	1205mm	1365mm
3000mm	D/L	3120mm	3280mm	3000mm	3160mm
4000mm	D/L	4120mm	4320mm	4000mm	4200mm
5000mm	D/L	5120mm	5420mm	5000mm	5300mm
6000mm	D/L	6120mm	6420mm	6000mm	6300mm
7000mm	D/L	7150mm	7510mm	7020mm	7380mm
8000mm	D/L	8150mm	8510mm	8020mm	8380mm
9000mm	D/L	9150mm	9550mm	9020mm	9420mm
10000mm	D/L	10150m m	10550m m	10020m m	10420m m

GATE INFILL


A flat DUO Twin wire mesh infill panel is welded into a standard Bastion swing gate frame. As well as swing gates we can also supply a range of cantilever and tracked sliding gates.




BRITISH STANDARDS / QUALITY ASSURANCE
Swing Gates and posts are manufactured generally in accordance with (and in some respects exceed) the requirements of BS1722, Part One (for heights of 1.8mtr high and below). The standard width of a single leaf gate is 1200mm wide, enabling it to fall in line with d

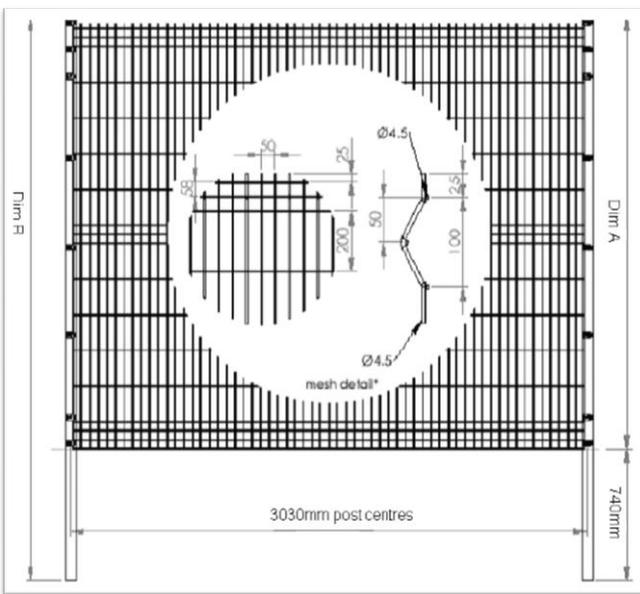

	FENCE HEIGHT		
	1.8m	2.0m	2.4m
Dim A	1810mm	2010mm	2410mm
Dim B	2550mm	2750mm	3150mm
Panel Height	1780mm	1980mm	2380mm
Panel Width	3000mm		
Post Spec	60x40mm		
No. of Clips	7	8	8



Fully Exploded View



As supplied to site

BASTION V

The Professional Choice

